


VISTA®
Bearing

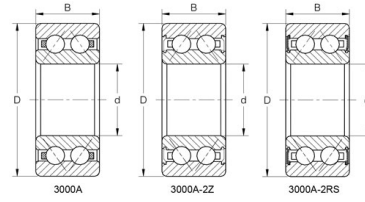

تعيين	(الأبعاد الرئيسية (مم)			(تقييمات الحمل الأساسية (KN)		(سرعة محدودة (دورة في الدقيقة)		وزن (كـلـغـ)
	د:	د:	ب:	(ديناميكي (كر	(ثابت (كو	شحم	بترول	
3000A-2Z	10	26	12	5.5	3.2	18000	-	0.022
3200A-2Z	10	30	14.3	7.5	4.3	16000	-	0.05
3001A-2Z	12	28	12	6.1	3.7	17000	-	0.025
3201A-2Z	12	32	15.9	9	4.9	14000	-	0.058
3002A-2Z	15	32	13	8.5	5.4	14500	-	0.036
3202A-2Z	15	35	15.9	10	6	11000	-	0.066
3302A-2Z	15	42	19	14	8	10000	-	0.13
3003A-2Z	17	35	14	9	6	12500	-	0.042
3203A-2Z	17	40	17.5	12.7	7.8	9000	-	0.096
3303A-2Z	17	47	22.2	17.3	10.4	8000	-	0.18
3804A-2Z	20	32	10	4.9	3.9	13000	-	0.02
3904A-2Z	20	37	13	9.3	6.6	12000	-	0.046
3004A-2Z	20	42	16	14.2	9.6	11000	-	0.08
3204A-2Z	20	47	20.6	19	12.1	8000	-	0.16
3304A-2Z	20	52	22.2	19	12.3	8500	-	0.22
3805A-2Z	25	37	10	5.5	4.9	11500	-	0.025
3905A-2Z	25	42	13	9.6	7.5	11000	-	0.062
3005A-2Z	25	47	16	15.2	11	9500	-	0.1
3205A-2Z	25	52	20.6	20.6	13.9	7500	-	0.19
3305A-2Z	25	62	25.4	27.6	17.8	7500	-	0.367
3806A-2Z	30	42	10	5.7	5.6	10000	-	0.03

3000A-2Z Series

3906A-2Z	30	47	13	9.9	8.3	9500	-	0.095
3006A-2Z	30	55	19	20.3	15.5	8000	-	0.16
3206A-2Z	30	62	23.8	25.7	18.5	6300	-	0.31
3306A-2Z	30	72	30.2	37.2	25.9	6000	-	0.59
3807A-2Z	35	47	10	6.1	6.2	8500	-	0.035
3907A-2Z	35	55	15	12.9	11.3	8000	-	0.138
3007A-2Z	35	62	20	24.2	20.4	6500	-	0.24
3207A-2Z	35	72	27	30.4	23.5	5600	-	0.51
3307A-2Z	35	80	34.9	46.1	35.3	5300	-	0.82